




PENDANT / CEILING INSTALLATION  
**O100P RING LIGHT**

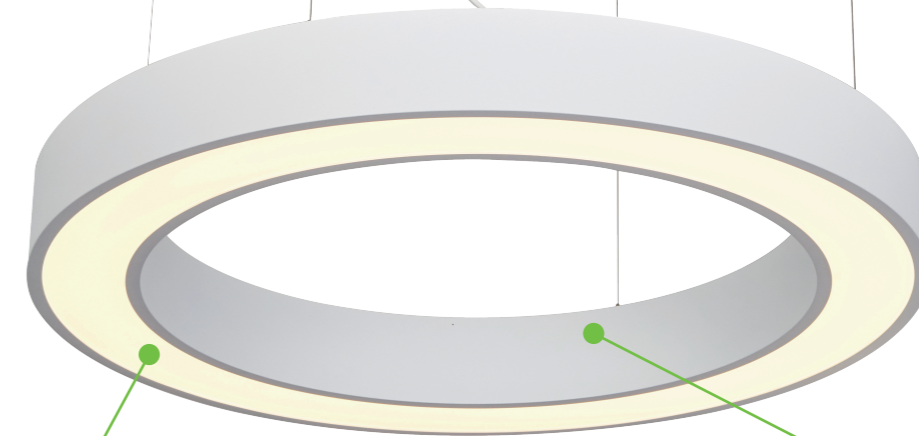


**PMMA Lens**  
 One piece laser cut

**6063 Aluminum**  
 Silver / Black clear matt anodize  
 White/Black matt powder coating  
 Customized RAL color available

|        | 2700K      | 3500K    | 4000K                        | Setable White Available<br>1800K+6500K |           |                       |
|--------|------------|----------|------------------------------|--|-----------|-----------------------|
|        | Input Vol. | Power/pc | Lumen/pc<br>[Light W driver] | Dimming                                | Lens      | Dimension (D x W x H) |
| O10045 | 90-265 VAC | 30W      | 1500 lm                      | 0-10V/ DALI / Non-Dim                  | PMMA 1pc  | 450 x 110 x 100mm     |
| O10060 | 90-265 VAC | 40W      | 2300 lm                      | 0-10V/ DALI / Non-Dim                  | PMMA 1pc  | 600 x 110 x 100mm     |
| O10075 | 90-265 VAC | 60W      | 3150 lm                      | 0-10V/ DALI / Non-Dim                  | PMMA 1pc  | 750 x 110 x 100mm     |
| O10010 | 90-265 VAC | 72W      | 4150 lm                      | 0-10V/ DALI / Non-Dim                  | PMMA 1pc  | 900 x 110 x 100mm     |
| O10012 | 90-265 VAC | 92W      | 5050 lm                      | 0-10V/ DALI / Non-Dim                  | PMMA 1pc  | 1000 x 110 x 100mm    |
| O10015 | 90-265 VAC | 120W     | 7200 lm                      | 0-10V/ DALI / Non-Dim                  | PMMA 2pcs | 1500 x 110 x 100mm    |
| O10018 | 90-265 VAC | 140W     | 8100 lm                      | 0-10V/ DALI / Non-Dim                  | PMMA 2pcs | 1800 x 110 x 100mm    |

**Note:** The given data are typical values. Due to tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.  
 -15% luminous flux at DALI and 0/1-10V driver, and -10% Non-Dim driver.

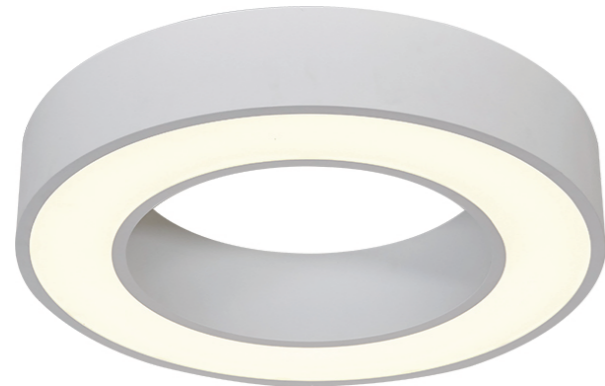

Light system fitting for Sus-pendant or Ceiling Surface mounting. Extruded aluminum anodized silver with PMMArylic diffuser. Equiped Osram SMD LEDs in Warm White or Neutral White, with MeanWell Drivers for Non-Dim option. Uninterrupted lines of light for maximum uniformity and aesthetics

- ▶ Aluminum extruded and bend fixture for good heat dissipation
- ▶ Wide light distribution for shadowless
- ▶ Designed and engineered with the architectural specifier in mind
- ▶ Refined construction and classic linear illumination
- ▶ Field-adjustable stainless steel cable pendant or surface mount


**RANGE OF APPLICATIONS**

General or local lighting in Office, Conference Rooms, Retail Restaurants, Residential, Corridors or Public Building, etc.


**ELECTRIC GEAR**

Constant current Triac / DALI / Non-dim drivers, mounted on the top of the support for the LEDs modules.


**DIMENSION**

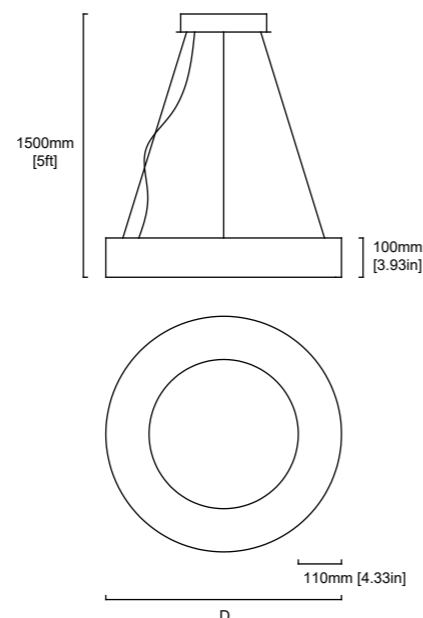

**CANOPY INSTALLATION**

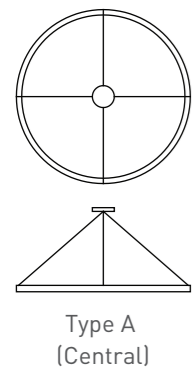

Only Apply to the fixture diameter less than 1000mm [3.2ft]

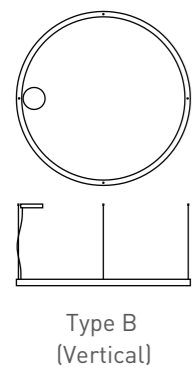

Apply to All fixtures.

**INSTRUCTIONS FOR INSTALLATION AND USE**

**WARNING:** The security of this equipment is guaranteed only with compliance of these instructions, so you must keep them. Installation and all non-routine maintenance must be carried out only by qualified personal.

Disconnect power before taking any action on the fitting.

Blueview is not responsible for any damage to persons and/or property resulting from improper installation, misuse, or unauthorized modifications made to their products.

Obtain the correct power supply unit (accessory not included), install it in a remote location and prepare the cables for their connection

Connect to the power supply (PAYING ATTENTION TO OBSERVE POLARITY, parallel connection)

Explanation of the symbols on the label.

Due to a program of continuous improvement information is subject to change without notice.  
© Blueview 2019 – All rights reserved.  
Made in China.

BLUEVIEW ELEC-OPTIC TECH CO.,LTD  
Tel: +86-28-8148 0011 Fax: +86-28-8148 1258  
Mail: sales@blueviewled.com  
Web.: www.blueviewled.com  
Add: No.1000, Konggang 2nd Konggang Road, Southwest Aviation Industrial Zone, Chengdu, China. 610207